

9300 Panel Rebuild


Andrew Brown

Contents

- Old vs New
- Controls Architecture
- Design Process
- Project Documentation
- Install Preparation
- Gameplan


Existing 9300 Main Panel

- Built in 1998
- Some components no longer supported
- Unused components
- Baked on powder
- Very limited functionality
- Frequently down for “ghost issues”

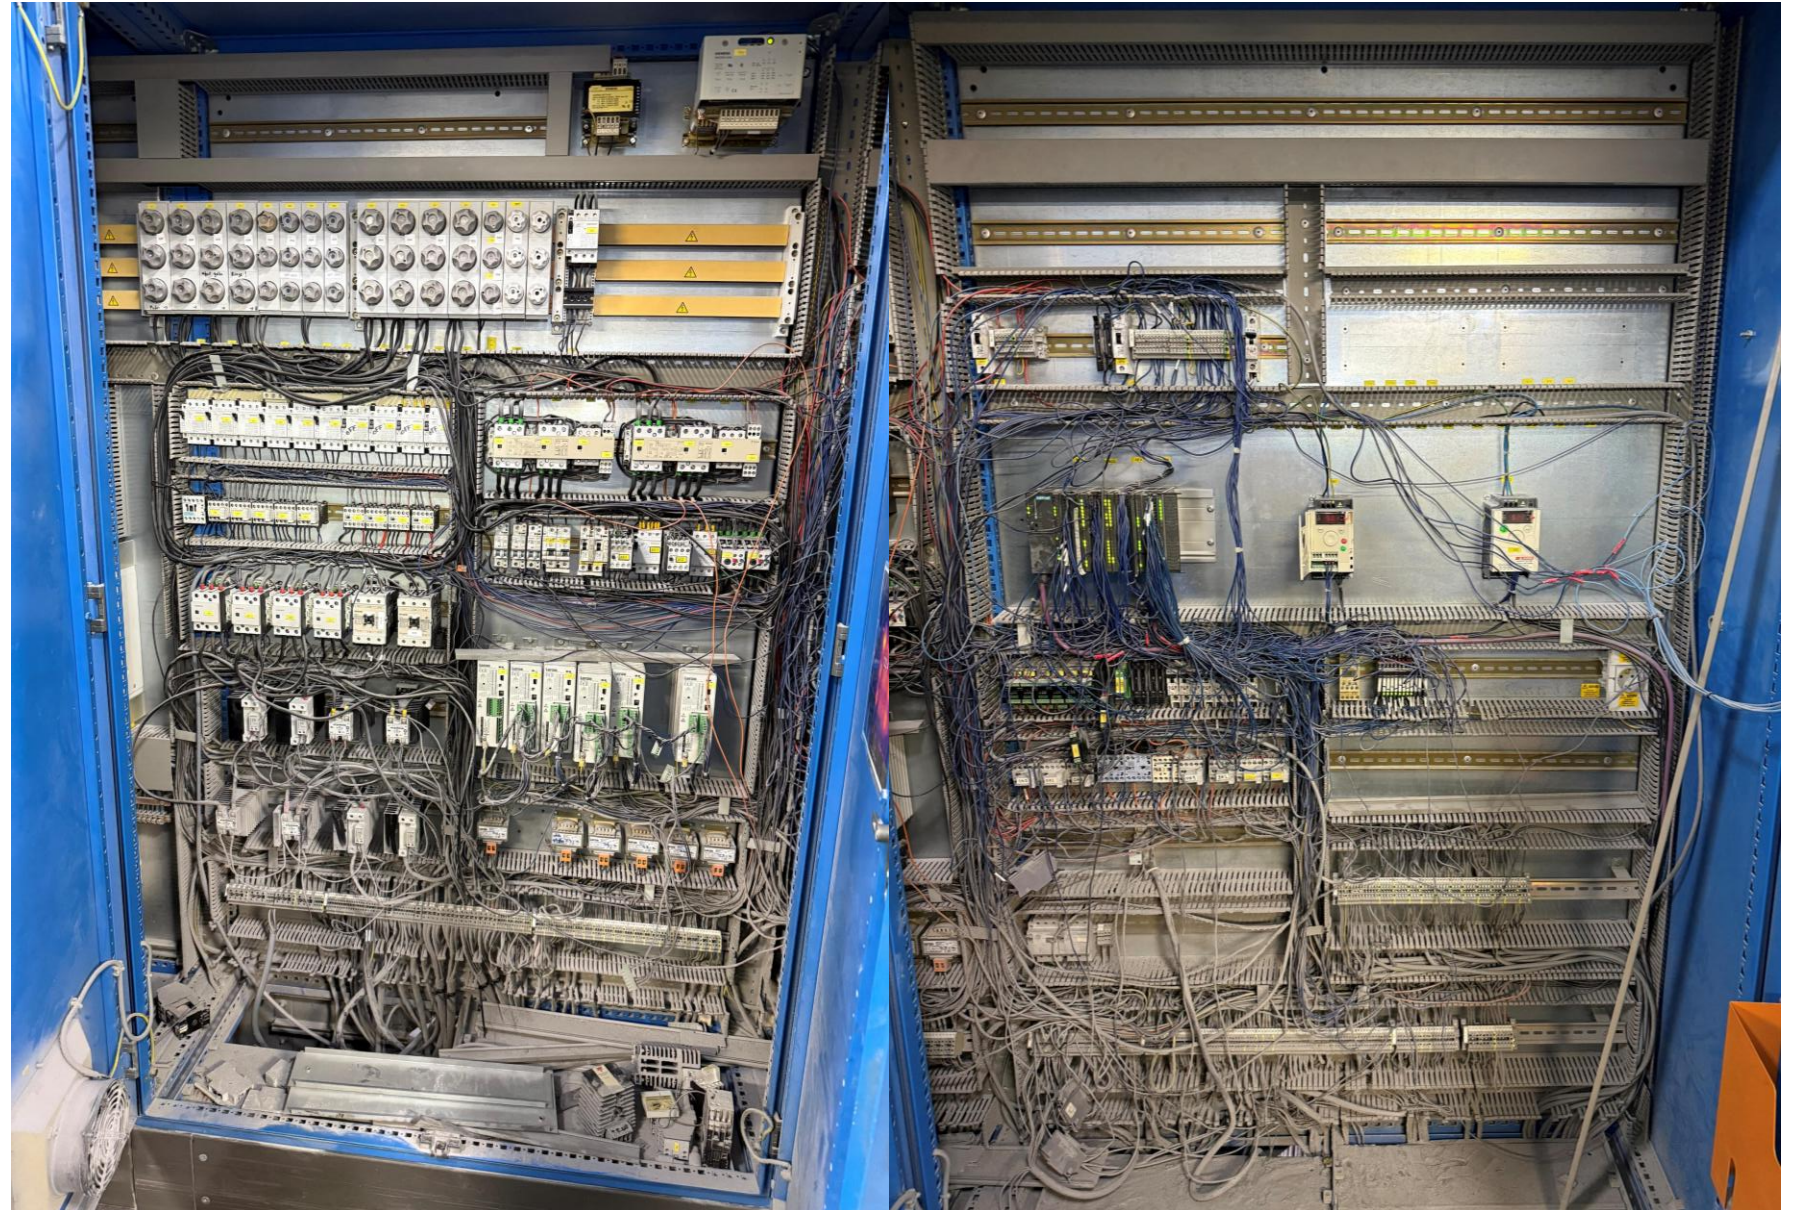


New 9300 Panel

- Added upstairs HMI
- Fusing updated to appropriate sizes
- Unused components removed
- Jogging and Directional control for belt positioning during repairs
- Encoders on cabin belts for tight control and damage prevention.
- All belt sensors and tracking cylinders are controlled centrally.
- Vortex cooled enclosure with no intake of ambient air to prevent powder build up.

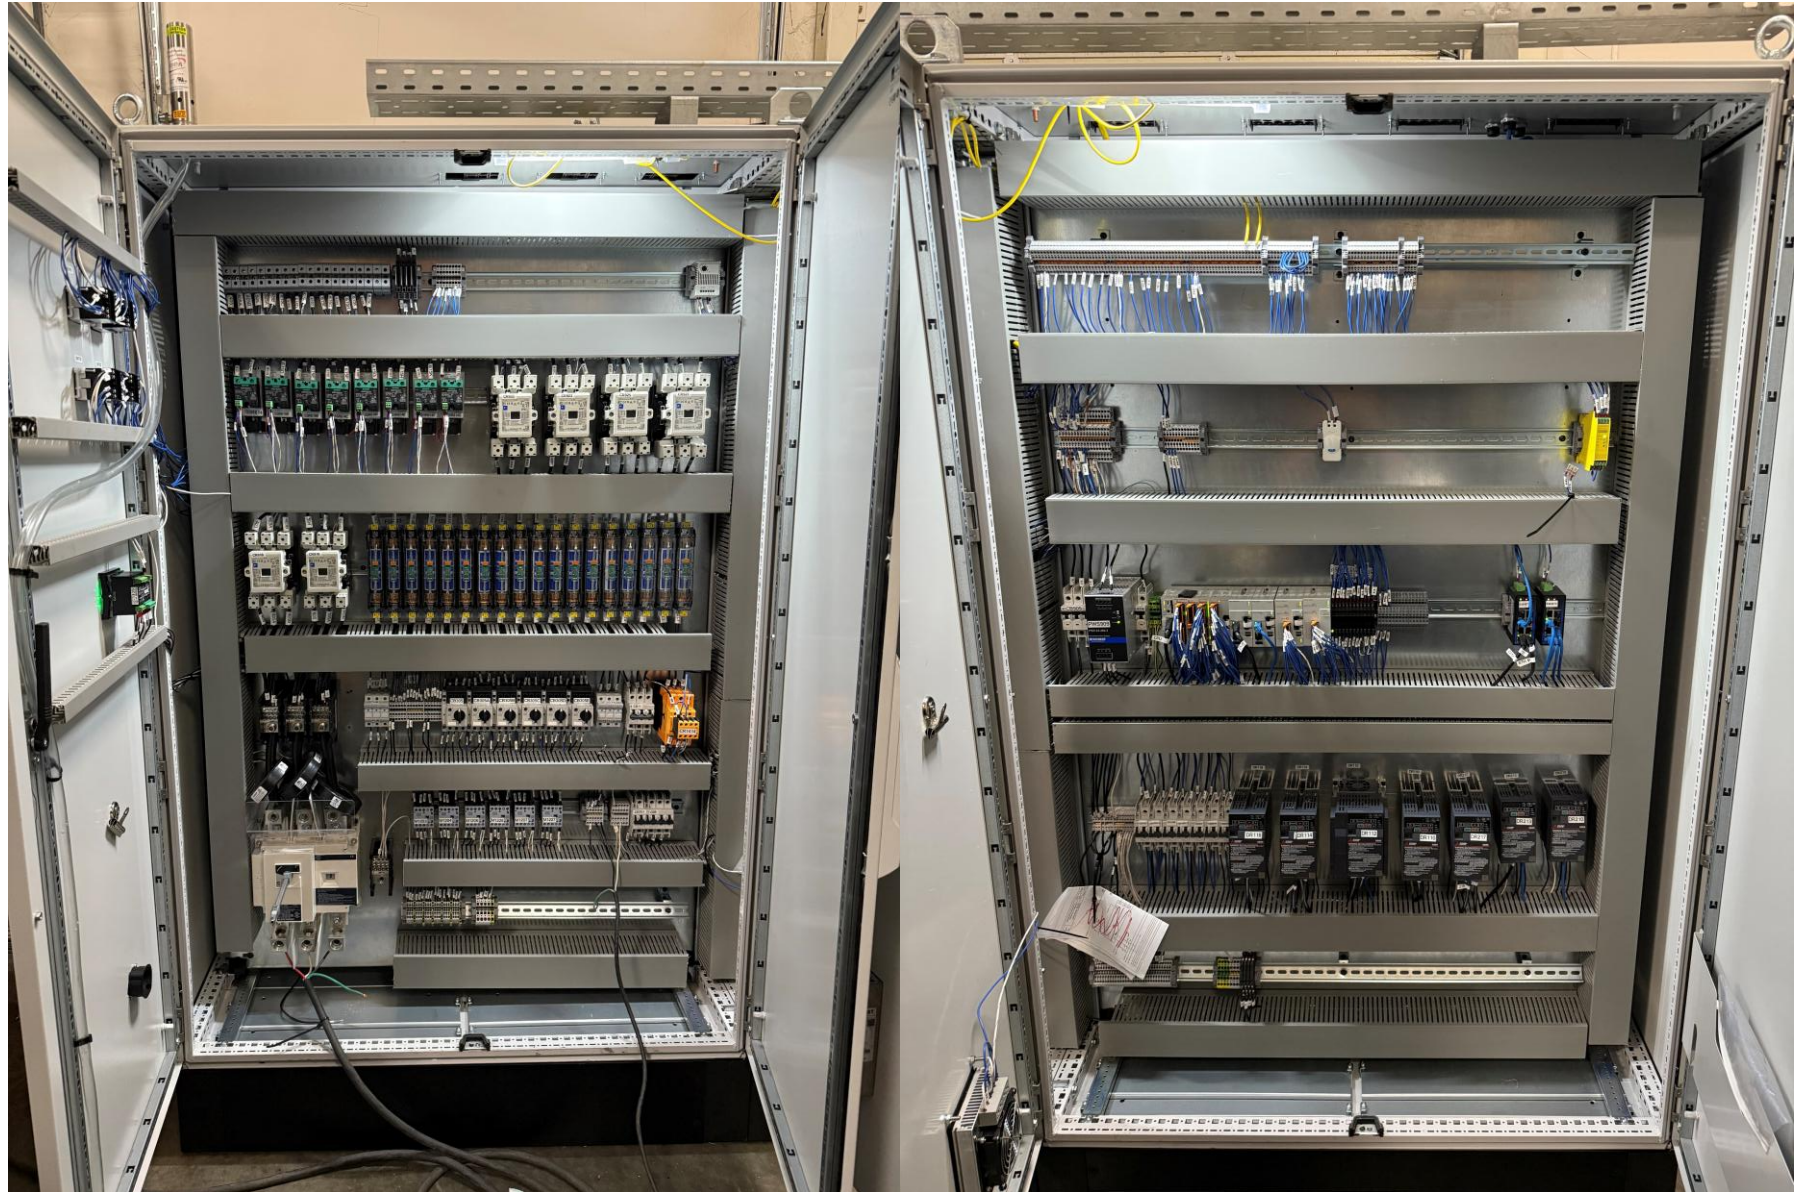



9300 Controls Architecture

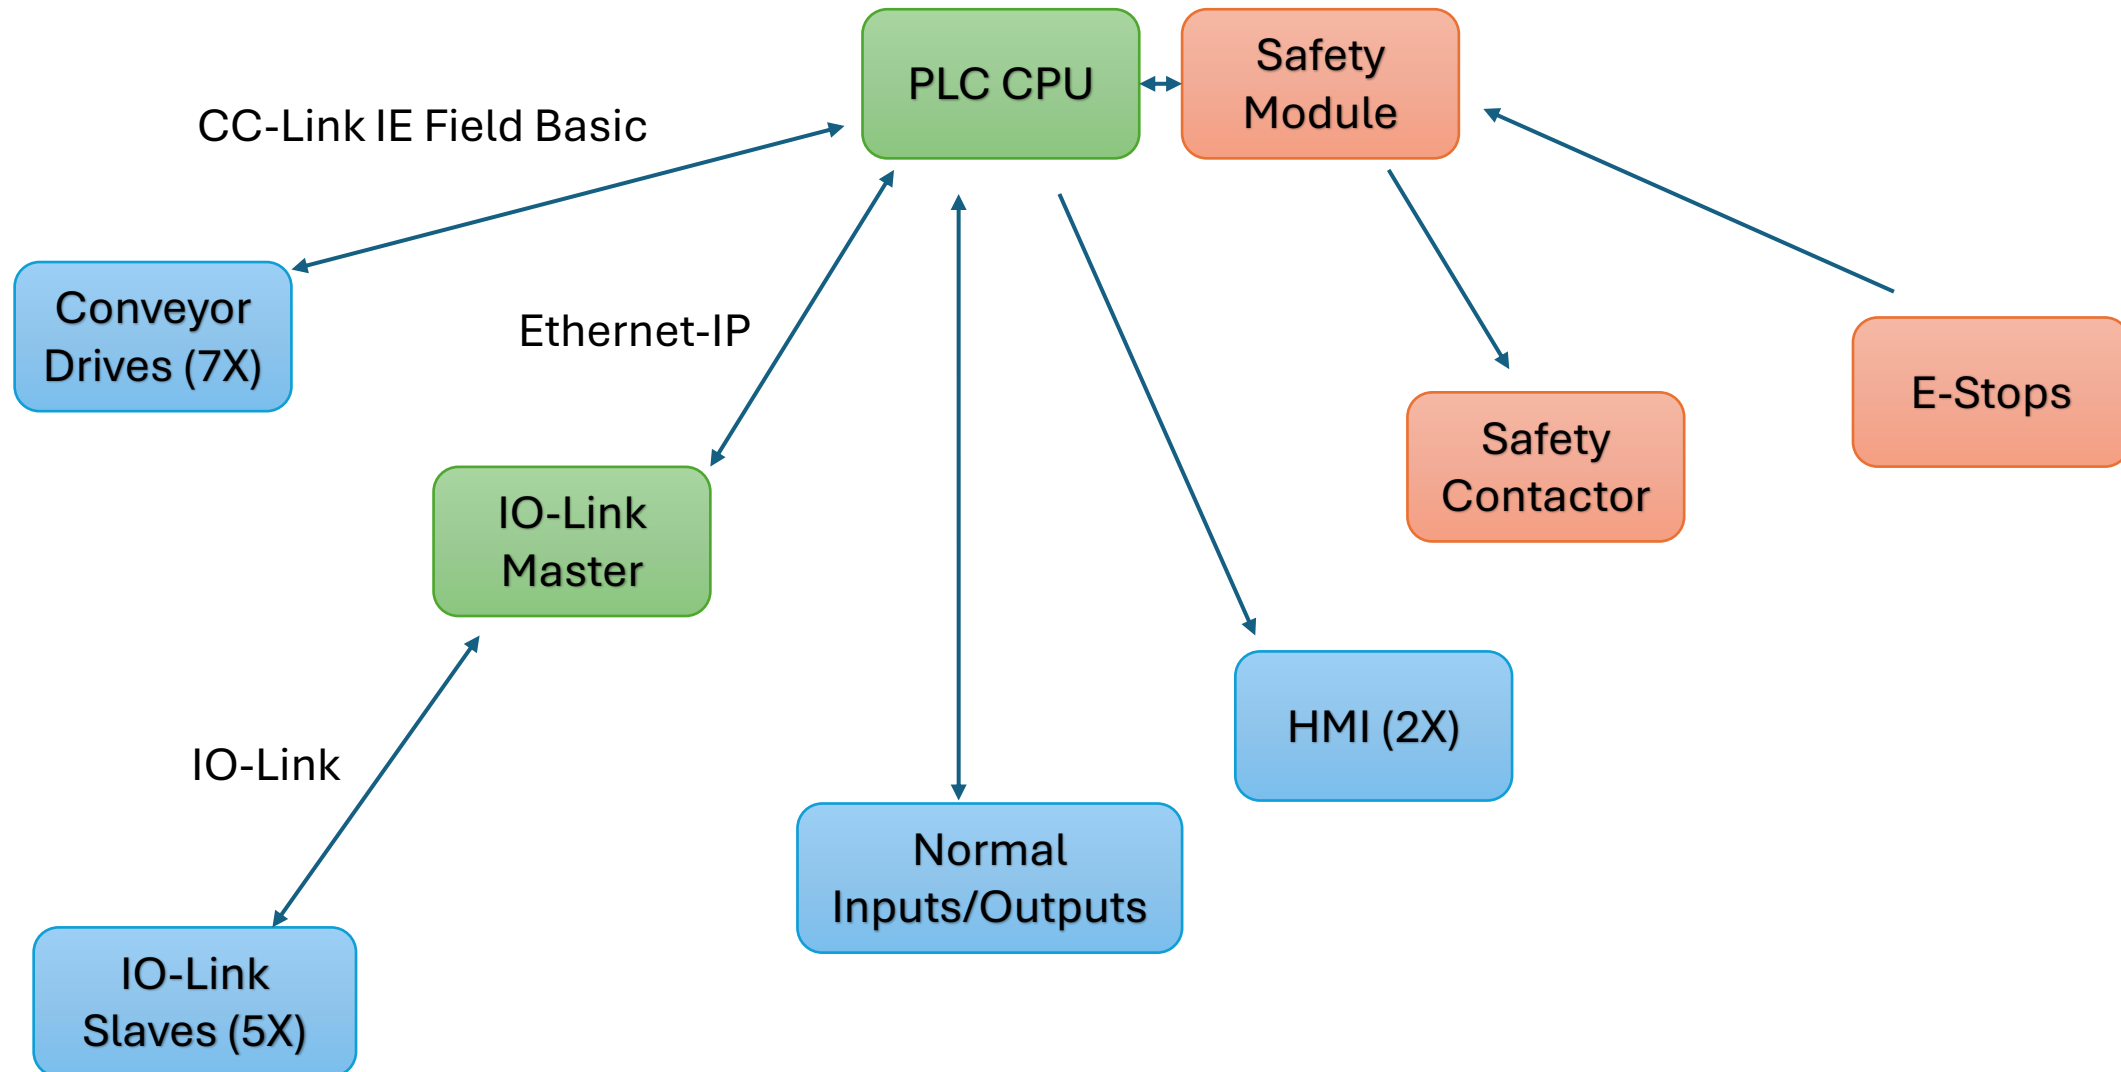


Design Process

- Panel schematic was designed side by side with the originals where applicable.
- Fusing/Overload ratings were modified as necessary and recommended via component manufacturer specifications.
- Controls changes were made for enhanced functionality.
- Main operator interface is very similar to make training simple.

Project Documentation

- All project documentation is available on the server including BOM, Schematics, programs, relevant manuals.



Name	Date modified	Type
9300_01 Drawings	5/20/2025 12:55 PM	File folder
9300_02 Electrical	5/13/2025 1:00 PM	File folder
9300_03 PLC & HMI	7/7/2025 3:18 PM	File folder
9300_04 EIP Files	6/27/2025 2:19 PM	File folder
9300_05 Purchased Components	5/20/2025 12:33 PM	File folder
9300_06 Support Documents	7/1/2025 4:47 PM	File folder
9300_07 VFD Files	7/1/2025 4:51 PM	File folder

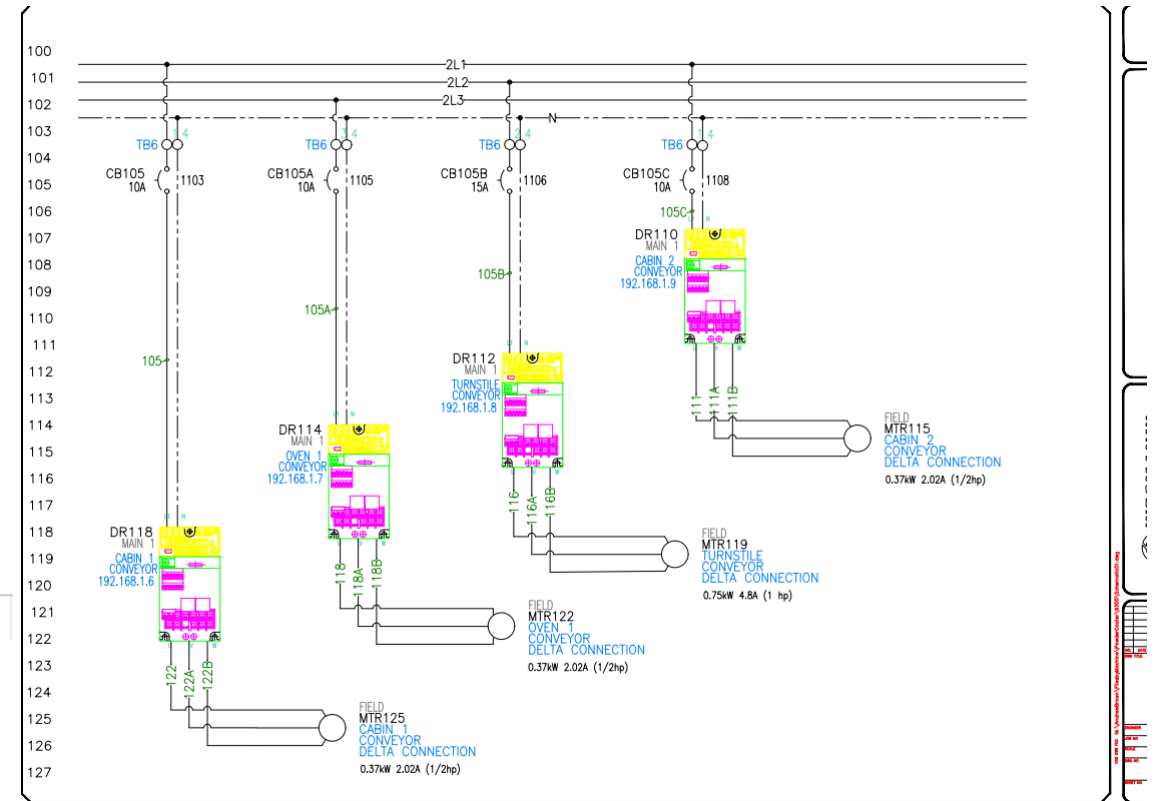


Install Preparation

- All basic machine functions of the panel have been tested and verified.
- All wire connections in the panel have been checked via meter.



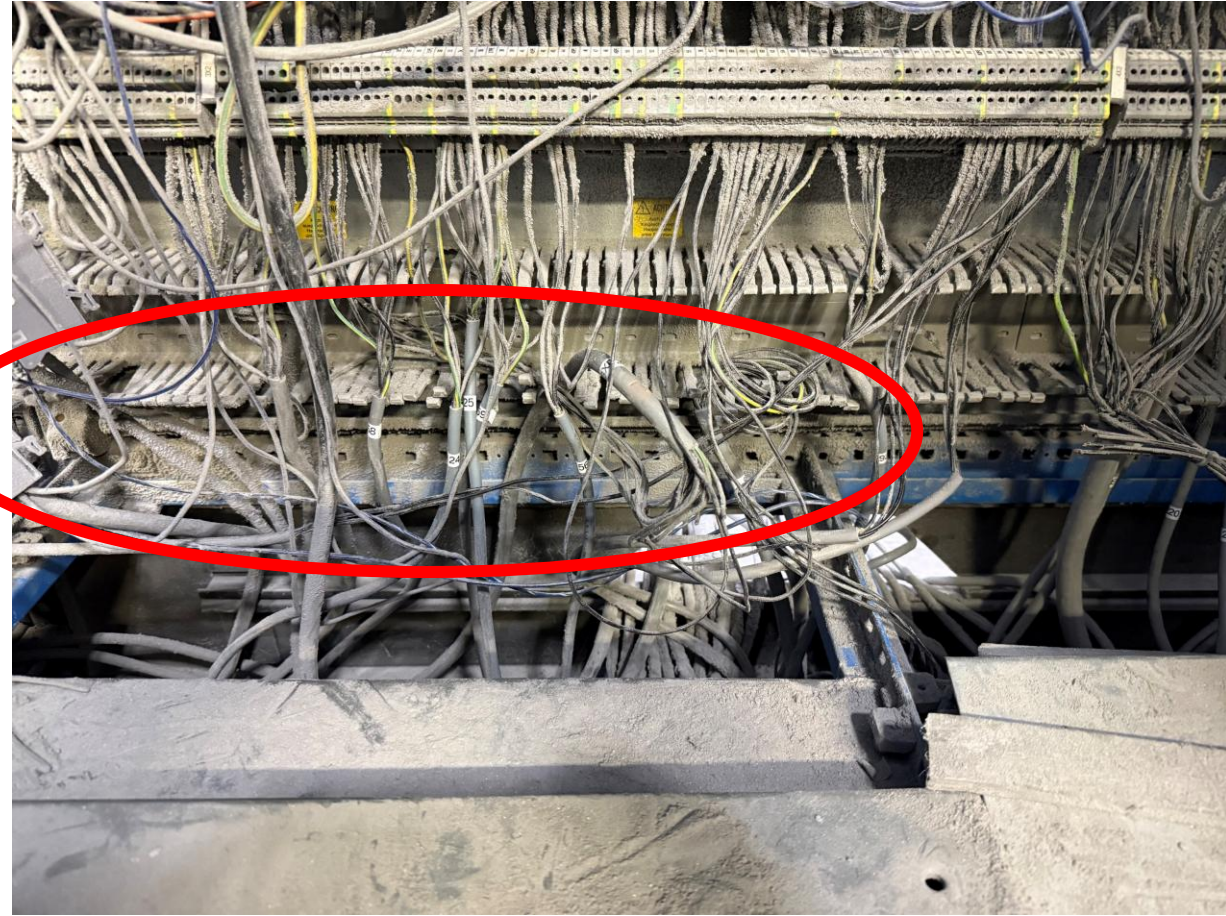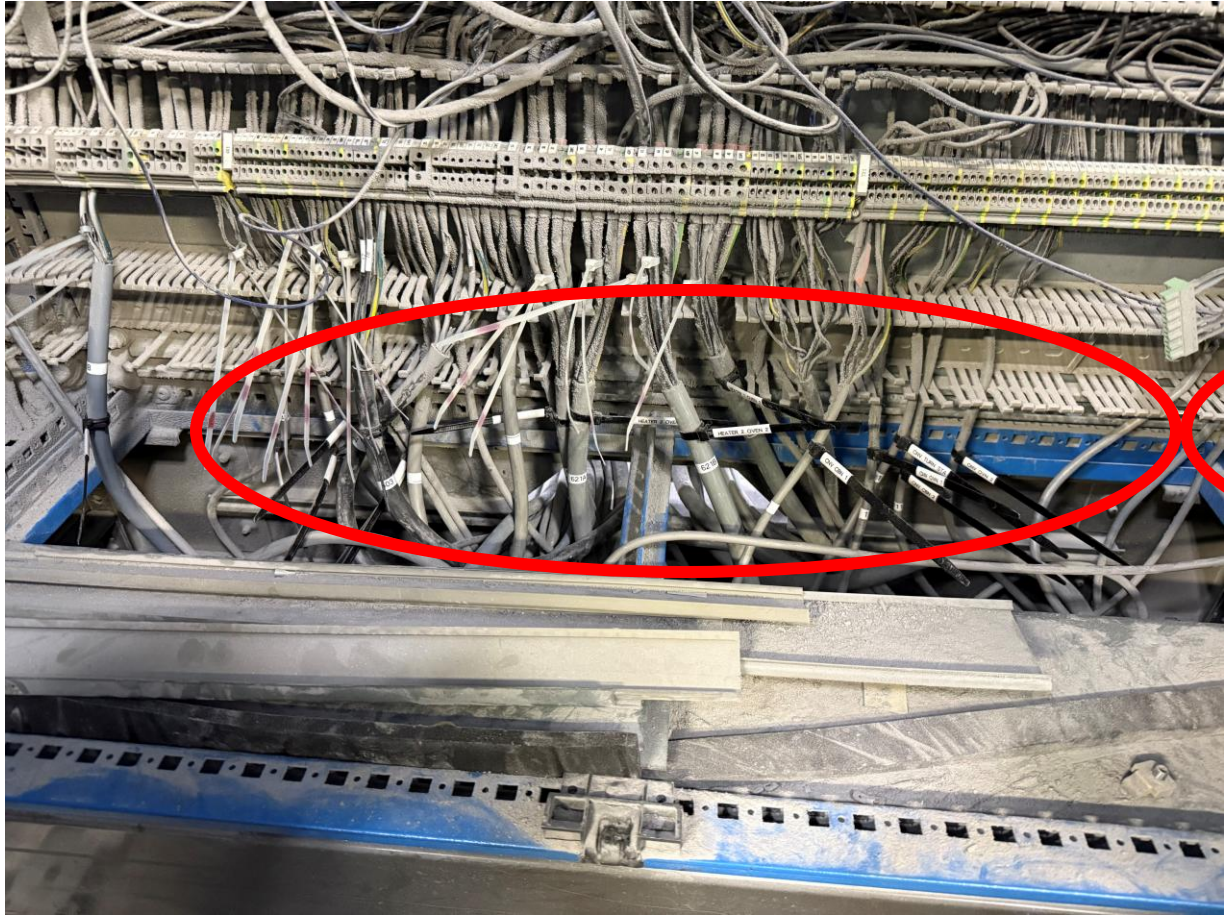

- All existing field cables that will remain, have been marked.

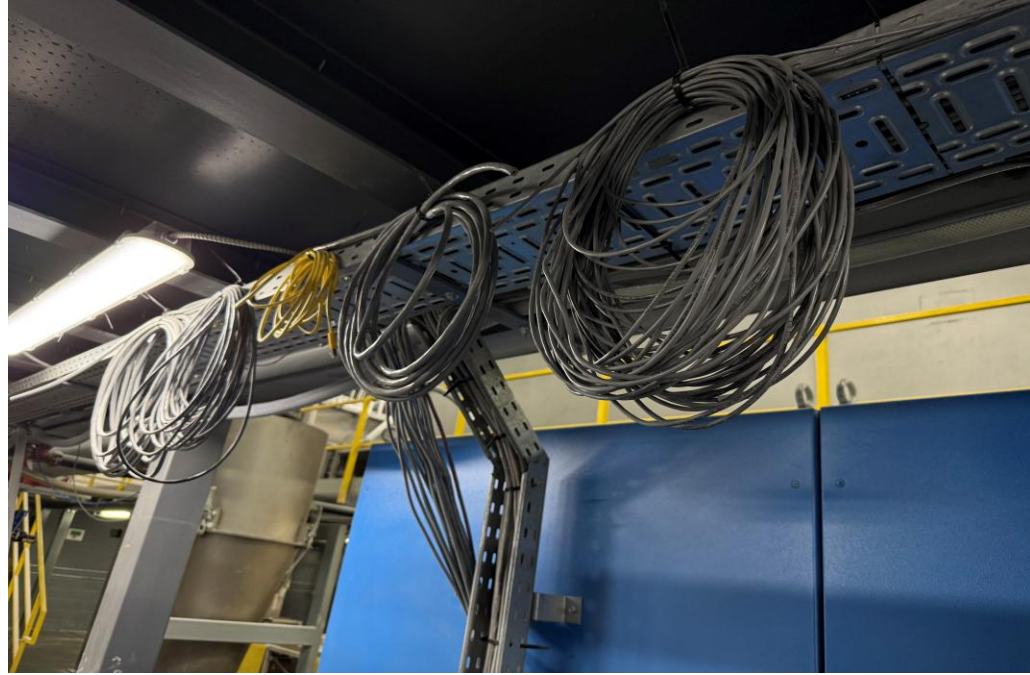

- All new field cabling has been run, labeled and terminated where possible.



- HMI 2 is installed
- HMI 1 box is complete and ready to be bolted down.

Install Gameplan

- Removal
- Install
- Testing
- Start-up
- Follow-up

Thanks!